


MAGICSHINE®




MJ-906S USER MANUAL



WARNING



ACCESSORY/STRUCTURE



MJ-906S



Handlebar mount



3mm Hex



Nylon strap



Aero bar compatible strap



USB-C Cable




Gopro mount



Battery pack



Power extension cable



Notice:

The **light** needs to match power with the new e-bike before first using to reach the maximum **light** effect.

The **light** defaults to the minimum power state from the factory setting.

△Instructions of power matching:

1. Long press the button on the bottom of the light(Under power off situation)
2. Power on the E-bike
3. Wait the light working from min brightness to max brightness to turn off.
4. Power match successfully, power on the E-bike again.

SWITCHING THE LIGHTING MODE

Modes Switch:

From bicycle light mode to E-bike light mode:

Long press power button for 8 seconds until it flashes.


From E-bike light mode to bicycle light mode:

Long press power button for 8 seconds until it lights constantly.

Bike mode




1s

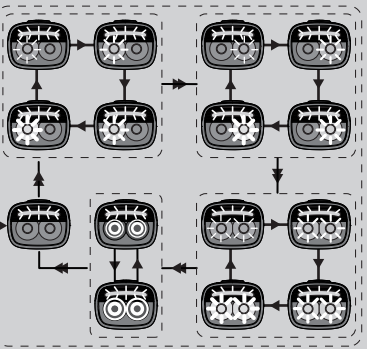

E-bike mode



NIGHT



DAY



Click













Double clicks





Hold 1 second

LUMENS/BURNING TIME

Bike mode

BRIGHTNESS	DRL	/	/	/
  h:min	35	/	/	/
	35:30	/	/	/
CONSTANT	ECONOMICAL	LOW	MID	HIGH
  h:min	800	1800	2500	4500
	10:30	05:30	04:30	04:00
  h:min	600	1200	1600	2300
	11:30	07:00	05:00	04:30
  h:min	600	1200	1600	2300
	11:30	07:00	05:00	04:30
FLASH	FLASH 1	FLASH 2	/	/
  h:min	0-2300	0-600	/	/
	06:30	18:30	/	/



E-bike mode

NIGHT	HIGH	MID	LOW	FLASH
 LUMENS	4500	2500	1800	0-1800
DAY	DRL	/	/	/
 LUMENS	35	/	/	/



All data are measured in accordance with ANSI/NEMA FL 1-2009. The test was conducted at a temperature of 25°C and a wind speed of 25 km/h. The runtime may vary depending on external temperature and ventilation conditions, and these deviations may affect the result of testing.

HOW TO RECHARGE



Standard charging time
Approx. 9.5hrs (5V 2A)

BATTERY INDICATOR



RED FLASH
0%-10%




RED
11%-30%




HOW TO INSTALL




1.




2.




3.



4.




5.



6.

HOW TO INSTALL BATTERY PACK

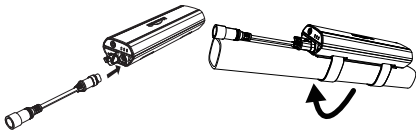

SPECIFICATION

ANSI FL 1 STANDARD

LIGHT OUTPUT



BEAM DISTANCE



PEAK BEAM INTENSITY



IMPACT RESISTANCE



WATER RESISTANT



EN WARRANTY

The Magicshine lighting system is warrantied for 24 months from the date of purchase.

If you register the lighting system on the Magicshine website you will receive a bonus 6 month warranty.

Battery packs and AC adapters have a 6 month warranty, however, there is no bonus warranty available.

The warranty is limited to defects in material and workmanship on the lighting system itself, the battery pack and the AC adapter.

The warranty is only valid if the affected parts have not been tampered with and there is no intentional damage. Please keep your proof of purchase in a safe place. Proof of purchase must

be presented in the event of any claim. Please contact the specialist retailer from whom you purchased the device for complaint or warranty claim.

Alternatively, you can send your complaint or claim directly to Magicshine at

Tel: (+86) 755-295 536 69

Fax: (+86)755-275 897 77

E-mail: support@magicshine.com (order from Magicshine.com online store)

service@magicshine.com (order from other sales channels)

In the event of a justified warranty claim and delivery of a replacement device, you will only be entitled to a model available when replacing. The manufacturer retains the right to make technical modifications.



Customer Information

Name: _____ Tel: _____

E-Mail: _____

Address: _____ Zip: _____

Product Information

Company Name / Website of the Seller: _____

Product Name: _____ Model No.: _____

Date of Purchase: _____ Contact: _____

Tel: _____ E-mail: _____

Address: _____ Zip: _____

Product Serial Number

Note: Register on Website to Gain 6 Months Extra Warranty Rights.

- Proof of purchase is required when obtaining warranty service.
- DO NOT return suspected defective parts directly to MAGICSHINE or the seller.
- Defective parts must only be sent to the seller you purchased your product from. Please contact them beforehand to confirm acceptance.

